

AFSKT ALUMINUM SCRIM KRAFT FOIL TAPE

COMPOSITION

Aluminum foil and Kraft paper tape coated with an acrylic or rubber adhesive.

PRODUCT APPLICATIONS


- HVAC, heat reflection, sealing applications, and general repair.

STORAGE AND HANDLING

The material should be stored away from heat sources and possibly kept in the original package, avoiding light exposure as well.

STANDARD LENGTH (S)

- 50 Yards / 45.72 Meters for **4.8 Mil**
- Contact Tape Providers for other available sizes

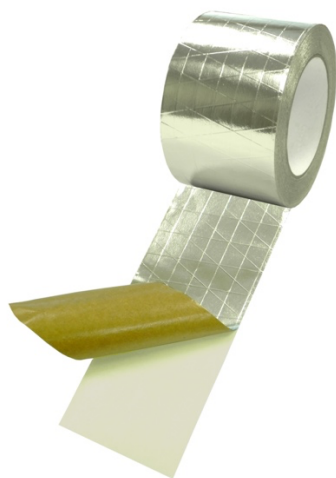

•**Note:** Contact Tape Providers for Custom Cores

PHYSICAL PROPERTIES

Product code	AFSKTA	AFSKTR
Adhesive Type	Solvent Based Acrylic	Synthetic Rubber Resin
Thickness	4.8 Mil	4.8 Mil
Tensile Strength	27.3 lbs/in	27.3 lbs/in
Adhesion to Steel	73 oz/in	91 oz/in
Temperature Range	176°F	176°F
Rolling Ball Tack	6 in	8 in
YD	50YD	50YD

TABLE OF MEASUREMENTS

STANDARD WIDTH(S):

IN	MM
2	48
3	72
4	96
6	144
47.25	1200
Custom Available	