

ASTB32GL ANTI SLIP TAPE

COMPOSITION

Aggressive acrylic adhesive. 60 grit silicon carbide.

PRODUCT APPLICATIONS

- Indoor And Outdoor. Walkways, Ramps, Stairways, Machine Shops, Work Areas, High Traffic Areas.

PHYSICAL PROPERTIES

STANDARD

METRIC

Tensile Strength	13 lbs/in	57.84 N/25 mm
Adhesion to Steel	54 oz/in	15.01 N/25 mm
Thickness	41 mils	1.04 mm
Elongation	25%	25%
Temperature Resistance	175 F	80°C

STORAGE AND HANDLING

Storage Conditions: From 15°C/59°F to 25°C/77°F with max. relative humidity of 65%.

Note: The material should be stored away from heat sources and possibly kept in the original package, avoiding light exposure as well.

STANDARD LENGTH (S)

- 60 Feet 20 Yards
- Contact Tape Providers for other available sizes


COLOR (S)

Glow in the dark.

TABLE OF MEASUREMENTS

STANDARD WIDTH(S)

IN	MM
1	25
2	50
3	75
4	100
6	150
12	300
Custom Available	

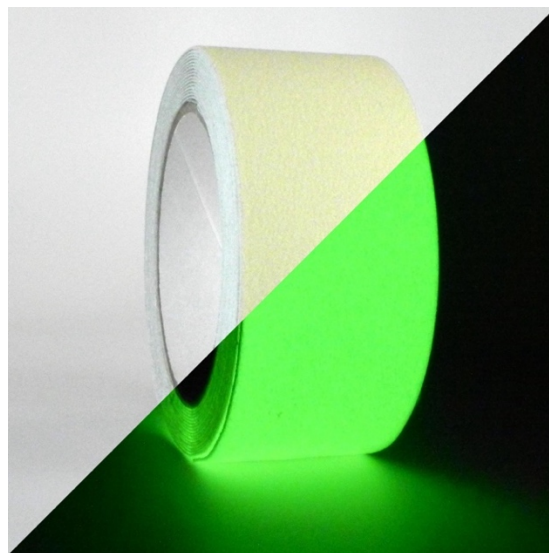

- Note:** Contact Tape Providers for Custom Printed Cores