AmTape® | Cellux®

HIGH PERFORMANCE MASKING TAPE

OUTDOOR 30 DAYS

UV PROTECTED

GHP-005

Discover our AmTape® High Performance Masking Tape, a step up from standard body shop tapes, delivering enhanced adhesion, temperature resistance, and surface protection for demanding automotive refinishing work. Built with a reinforced semi-crepe paper backing and an acrylic-resistant adhesive, it performs reliably through masking, painting, and heat cycles. The go-to solution for body shop professionals seeking durability and precision beyond the basics.



Surfaces

Metal, rubber, glass, and plastic.

1 Uses

- Single-stage and two-stage paint jobs.
- Masking around trims, lights, and bumpers.
- Collision repair and body refinishing.
- Masking in heated paint booths.
- Overlapping capability with solvent resistance.

2 Features

- Higher tack for a secure hold on metal, plastic, and rubber.
- Reinforced semi-crepe paper resists tearing and paint bleeding.
- Solvent-resistant adhesive for cleaner paint edges.
- Withstands heat up to (266 °F / 130 °C) during short bake cycles.
- Removes cleanly from automotive surfaces without lifting clear coat or paint.

3 Technical Data

Backing		Semi-crepe paper
Adhesive		Water base Acrylic
UV Resistance		30 days
Physical properties	**Standard**	**Metric**
180° peel force	8.9 - 12.5 oz/in	2.5 - 3.5 N/25mm
Tensile strength	19.41 - 21.69 lbs/in	36-50 N/10 mm
Temperature 30min	266°F	130°C

4 Storage Conditions

- Store in a cool, dry place, away from direct sunlight and excessive humidity to maintain film performance. For best results, use this product within one year from the date of production.

5 Size

Width	Length
0.70" (18mm)	60 yd (54.8m)
0.94"(24mm)	60 yd (54.8m)
1.41" (36 mm)	60 yd (54.8m)
1.88"(48 mm)	60 yd (54.8m)


6 How to use

- Ensure the surface is clean, dry, and dust-free before application.
- Apply the tape with firm, even pressure for optimal adhesion.
- Remove within 30 minutes if exposed to high temperatures (266 °F / 130 °C).
- For best results, peel off slowly at a 45-degree angle to avoid surface damage.

7 Logistic Information

SKU	Size / Description	Cases/pallet	Roll/Case
GHP005-18060PK1	0.70 " (18mm) x 60 yd (54.8m) GREEN HIGH PERFORMANCE Masking Tape - OUTDOOR 30-Day UV-Protected - Individually packaged	144	32
GHP005-24060PK1	0.94 " (24mm) x 60 yd (54.8m) GREEN HIGH PERFORMANCE Masking Tape - OUTDOOR 30-Day UV-Protected - Individually packaged	144	24
GHP005-36060PK1	1.41 " (36mm) x 60 yd (54.8m) GREEN HIGH PERFORMANCE Masking Tape - OUTDOOR 30-Day UV-Protected - Individually packaged	144	16
GHP005-48060PK1	1.88 " (48mm) x 60 yd (54.8m) GREEN HIGH PERFORMANCE Masking Tape - OUTDOOR 30-Day UV-Protected - Individually packaged	112	12

WE STICK STRONG

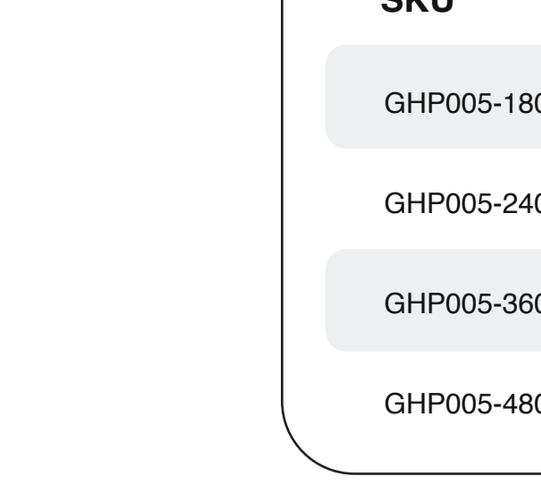

CELLUX US LLC / 1627 NW 84TH AVE DORAL, FL 33126 / **PHONE +1 (872) 345-0013**

REGISTERED TRADEMARK OF CELLUX US