AmTape® | Cellux®

MARINE LAMINATION
MASKING TAPE

OUTDOOR 30 DAYS

UV PROTECTED

MLT-004

Discover our AmTape® Marine Lamination Masking Tape, a top-tier professional grade masking solution designed for both interior and exterior applications. Engineered with a strong water-based adhesive, it ensures superior adhesion and clean removal from challenging surfaces for up to 30 days outdoors without leaving residue. With high-temperature resistance (266 °F / 130 °C) for up to 30 minutes) and excellent weather resistance, it is the ideal choice for marine refinishing, painting, and industrial masking applications.



Surfaces

Metal, Gelcoats, Fiberglass, Wood, Hot Surfaces.

1 Uses

- Perfect for masking during boat painting and detailing.
- Ideal for professionals requiring sharp paint lines.
- Suitable for use on gelcoats, fiberglass, and specialized marine finishes.
- Compatible with IR lamps and spray booths.
- Suitable for spray-painting processes.
- Effective for welding and polishing processes.

2 Features

- Semi-crepe paper technology designed for superior softness, exceptional flexibility, and no paint bleeding.
- Advanced adhesive technology that enables overlapping and offers solvent resistance.
- Extra water and weather resistance.
- Sharp edge lines with excellent color separation.
- High adhesion to challenging surfaces.

3 Technical Data

Backing		Semi-crepe paper
Adhesive		Water base Acrylic
UV Resistance		30 days
Physical properties	**Standard**	**Metric**
180° peel force	8.9 - 12.5 oz/in	2.5 - 3.5 N/25mm
Tensile strength	19.41 - 21.69 lbs/in	36-50 N/10 mm
Temperature 30min	266°F	130°C

4 Storage Conditions

- Store in a cool, dry place, away from direct sunlight and excessive humidity to maintain film performance. For best results, use this product within one year from the date of production.

5 Size

Width	Length
0.70" (18mm)	60 yd (54.8m)
0.94"(24mm)	60 yd (54.8m)
1.41" (36 mm)	60 yd (54.8m)
1.88"(48 mm)	60 yd (54.8m)


6 How to use

- Ensure the surface is clean. dry. and dust-free before application.
- Apply the tape with firm. even pressure for optimal adhesion.
- Remove within 30 minutes if exposed to high temperatures (266°F / 130°C).
- For best results. peel off slowly at a 45-degree angle to avoid surface damage.

7 Logistic Information

SKU	Size / Description	Cases/pallet	Roll/Case
MLT004-18060PK1	0.70"(18mm) x 60 yd (54.8m) Marine Lamination Masking Tape OUTDOOR 30-Day UV-Protected - individually packaged	144	32
MLT004-24060PK1	0.94"(24mm) x 60 yd (54.8m) Marine Lamination Masking Tape OUTDOOR 30-Day UV-Protected - individually packaged	144	24
MLT004-36060PK1	1.41"(36mm) x 60 yd (54.8m) Marine Lamination Masking Tape OUTDOOR 30-Day UV-Protected - individually packaged	112	16
MLT004-48060PK1	1.88"(48mm) x 60 yd (54.8m) Marine Lamination Masking Tape OUTDOOR 30-Day UV-Protected - individually packaged	112	12

WE STICK STRONG

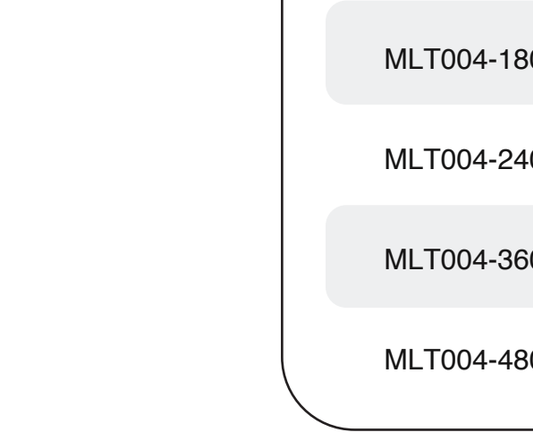

CELLUX US LLC / 1627 NW 84TH AVE DORAL, FL 33126 / **PHONE +1 (872) 345-0013**

REGISTERED TRADEMARK OF CELLUX US