AmTape® | Cellux®

GENERAL PURPOSE

MASKING TAPE

GPM-017

Our **General-Purpose Masking Tape** is the reliable choice for painting, decorating, repairs, and everyday masking applications. AmTape GPM017 is engineered with a balanced adhesive system and improve crepe paper, it bonds securely to a variety of surfaces while removing cleanly to help protect finishes and minimize residue. Whether you're creating crisp paint lines, securing materials, labeling items, or tackling DIY projects, AmTape general purpose offers the versatility, durability, and ease of use needed to complete every job with confidence and precision.



1 Uses

- **Temporary Fixtures:** Secure temporary fixtures or decorations, allowing for easy removal without damaging surfaces when the project is complete.
- **Surface Protection:** Safeguard surfaces during home repairs or renovations, preventing unwanted paint or adhesive residue with the reliable adhesion of our General-Purpose Masking Tape.
- **Labeling and Organizing:** Use for labeling boxes or organizing items, ensuring a neat and clear identification with the tape's easy write-on surface.

2 Features

- Versatile adhesion.
- Residue-Free.
- Interior use.
- Easy to remove.
- Write-On surface.

3 Technical Data

Backing		Smooth crepe paper
Adhesive		Natural Rubber
Physical properties	**Standard**	**Metric**
180° peel force	23.74 oz/in width	6.6 N/inz
Tensile strength	14.21 lbs/in width	63.2 N/in
Application Temperature	60 F to 150 F	16 C to 66 C
Clean Removal	Indoors	

4 Storage Conditions

- Tape storage guidelines recommend keeping it in its original packaging, ensuring a cool and dry environment, away from direct sunlight. It is advisable to utilize the tape within 12 months from the date of shipment. Moreover, when applying the tape, ensure that the surfaces are clean, dry, and devoid of any grease, oil, or other contaminants.

5 Size

Width	Length
1" (24mm)	60yd (54.8m)
1 1/2" (36 mm)	60yd (54.8m)
2" (48 mm)	60yd (54.8m)
3" (72 mm)	60yd (54.8m)


6 How to use

- Ensure the surface is clean, dry, and dust-free before application.
- Apply the tape with firm, even pressure for optimal adhesion.
- For best results, peel off slowly at a 45-degree angle to avoid surface damage.

7 Logistic Information

SKU	Size / Description	Cases/pallet	Roll/Case
GPM017-24060PK1	1"(24mm)x60 yd(54.8m)White general purpose masking tape individually packaged	144	36
GPM017-36060PK1	1 1/2"(36mm)x60 yd(54.8m) White general purpose masking tape individually packaged	144	24
GPM017-48060PK1	2"(48mm)x60 yd(54.8m) White general purpose masking tape individually packaged	112	24
GPM017-72060PK1	3"(72mm)x60 yd(54.8m) White general purpose masking tape - individually packaged	112	16

WE STICK STRONG

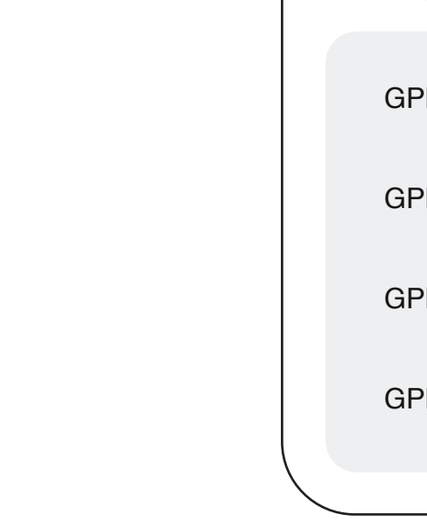

CELLUX US LLC / 1627 NW 84TH AVE DORAL, FL 33126 / **PHONE +1 (872) 345-0013**

REGISTERED TRADEMARK OF CELLUX US