

SPTA UHMW TAPE

COMPOSITION

Ultra High Molecular Weight Polyethylene with Acrylic Adhesive.

PRODUCT APPLICATIONS

- Reduce Friction, Noise, Wire Harnessing. For Conveyors, Chutes, Rollers, and Machinery Protection.

PHYSICAL PROPERTIES

STANDARD

METRIC

Tensile Strength	60 lbs/in	17 N/25 mm
Adhesion to Steel	60 oz/in	17 N/25 mm
Thickness	10, 15 Mil	0.25, 0.38 mm
Elongation	300%	300%
Temperature Resistance	200 F	93°C

STORAGE AND HANDLING

Storage Conditions: From 15°C/59°F to 25°C/77°F with max. relative humidity of 65%.

Note: The material should be stored away from heat sources and possibly kept in the original package, avoiding light exposure as well.

STANDARD LENGTH (S)

- 18 Yards / 16.64 Meters
- Contact Tape Providers for other available sizes


COLOR (S)

Blue

TABLE OF MEASUREMENTS

STANDARD WIDTH(S)

IN	MM
1/2	12
3/4	18
1	24
1.5	36
2	48
3	72
4	96
26	660
Custom Available	

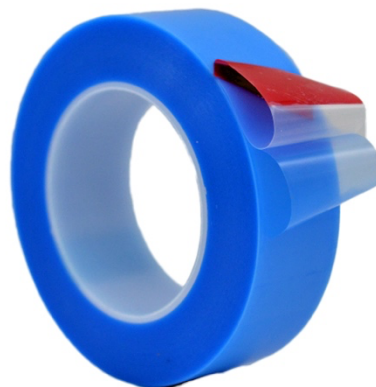

- **Note:** Contact Tape Providers for Custom Printed Cores